

Underwater Flood Light



FIREFLY LIGHTING

Phone : +61 7 3254 4333

Email : sales@fireflylighting.com.au

Address : 9/29 Links Ave North, Eagle Farm, Brisbane QLD 4009 Australia

www.fireflylighting.com.au

LANDSCAPE RANGE
COMMERCIAL GRADE


12W | 24V | 2700k



Firefly Lighting’s Range of Landscape products make light work of illuminating various outdoor environments. We created this range to sustain Australia’s extreme weather conditions so the product lasts well beyond its warranty period and leaves our customers with a smile from ear to ear. All our landscape products are IP rated, and come standard with anti-glare honeycombs and bevel cut hoods. Simply connect into existing 24V DC transformers, and you’re good to go!


SPECIFICATIONS

SKU	LS-UF-B
Lighting Output	687lm
Wattage	12W
Colour	Warm White
CCT	2700K
Beam Angle	30°
Light Source	6x2W Nichia
Voltage	24V DC
Current	500MA
Dimmable	No
Light Window	Tempered Glass 8mm
Cover & Housing	Hard chrome-plated molding Stainless Steel 316
IK Rating	IK07
IP Rating	IP68
Application Environment	20°C - 40°C @ < 1 metre depth
Warning	Must be installed underwater to prevent over heating.

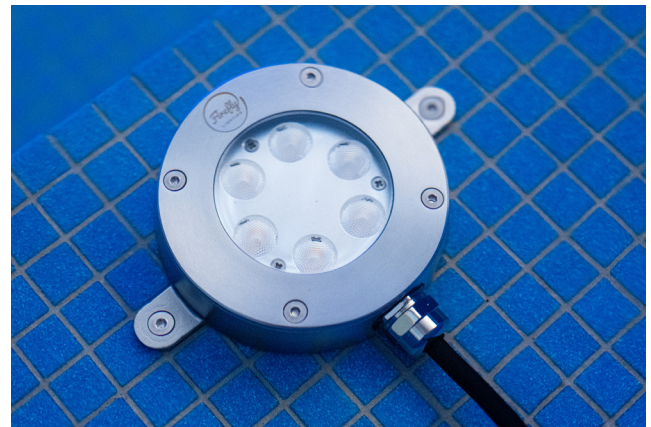


DIMENSIONS

Shown in mm



PHOTOMETRIC DATA

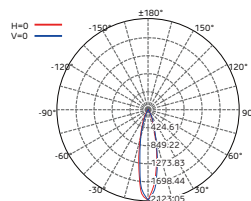

Lux Distance Curve

Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	509.87 LUX	1.0m 1.0m
4m	127.47 LUX	1.6m 1.6m
6m	56.65 LUX	2.9m 3.1m
8m	31.87 LUX	3.9m 4.1m
10m	20.39 LUX	4.9m 5.1m
12m	14.16 LUX	5.9m 6.1m

Vert. Spread: 27.6 Horiz. Spread: 28.7