

2W InGround Light Cats Eye Half



FIREFLY LIGHTING

Phone : +61 7 3254 4333

Email : sales@fireflylighting.com.au

Address : 9/29 Links Ave. North Eagle Farm,
Brisbane QLD 4009 Australia

www.fireflylighting.com.au

LANDSCAPE RANGE
COMMERCIAL GRADE

2W | 24V | 2700k



24V EXTRA
LOW VOLTAGE



INDOOR
OUTDOOR



UV
STABILISED



OUTDOOR
IP RATED



3 YEAR
WARRANTY



COMMERCIAL
GRADE



VANDAL
RESISTANT



GREEN
FRIENDLY



AUSTRALIAN
DESIGNED

Firefly Lighting's Range of Landscape products make light work of illuminating various outdoor environments. We created this range to sustain Australia's extreme weather conditions so the product lasts well beyond its warranty period and leaves our customers with a smile from ear to ear. All our landscape products are IP rated, and come standard with anti-glare honeycombs. Simply connect into existing 24V DC transformers, and you're good to go!

SPECIFICATIONS

HALF

FULL

SKU	LS-CE-2W-H-B	LS-CE-2W-F-B
Beam Angle	Half (2 x 120°)	Full (4 x 45°)
Voltage	24V DC	
Light Source	1 x 2W OSRAM	
CCT	2700K	
Wattage	2.5±0.1W	
Lumen Output	13lm	8.5lm
Dimmable	Yes, with PWM driver	
IP Rating	IP67	
IK Rating	IK10	
Housing Material	Die cast powder coated aluminium.	
Top Cover	Hardened Chrome Plated 316# Stainless Steel	
Ground Impedance (MΩ)	>20	
Resessed Sleeve Material	Polycarbonate/ABS Blend	
Cable	3m (2x1mm ²)	
Net Weight	600g	

LUMINAIRE




HOUSING




DIMENSIONS

Shown in mm

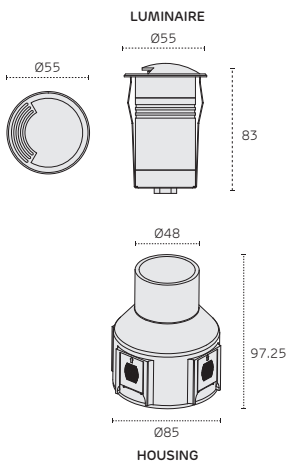

PHOTOMETRIC DATA

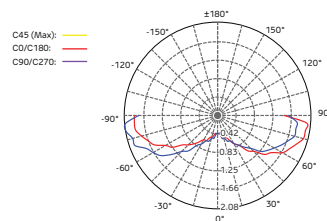

Lux Distance Curve

Center Beam LUX	Beam Width	
	V	H
0.10 LUX	141.4m	1.8m
0.03 LUX	282.8m	3.6m
0.01 LUX	424.1m	5.4m
0.01 LUX	565.5m	7.2m
0.00 LUX	706.9m	9.0m
0.00 LUX	848.3m	10.8m

Vert. Spread: 176.8 Horiz. Spread: 48.6

LIGHT DISTRIBUTION

